
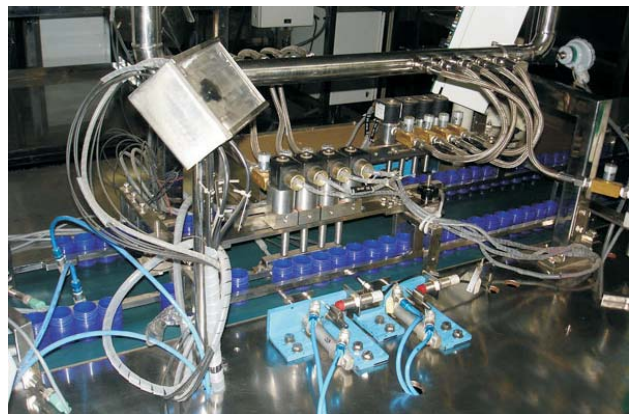
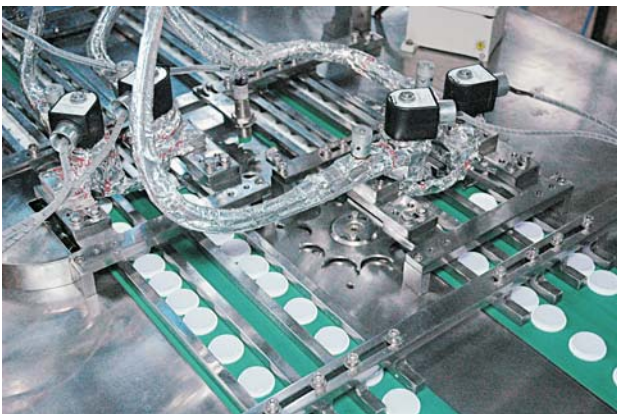


AURUM

Filling Systems

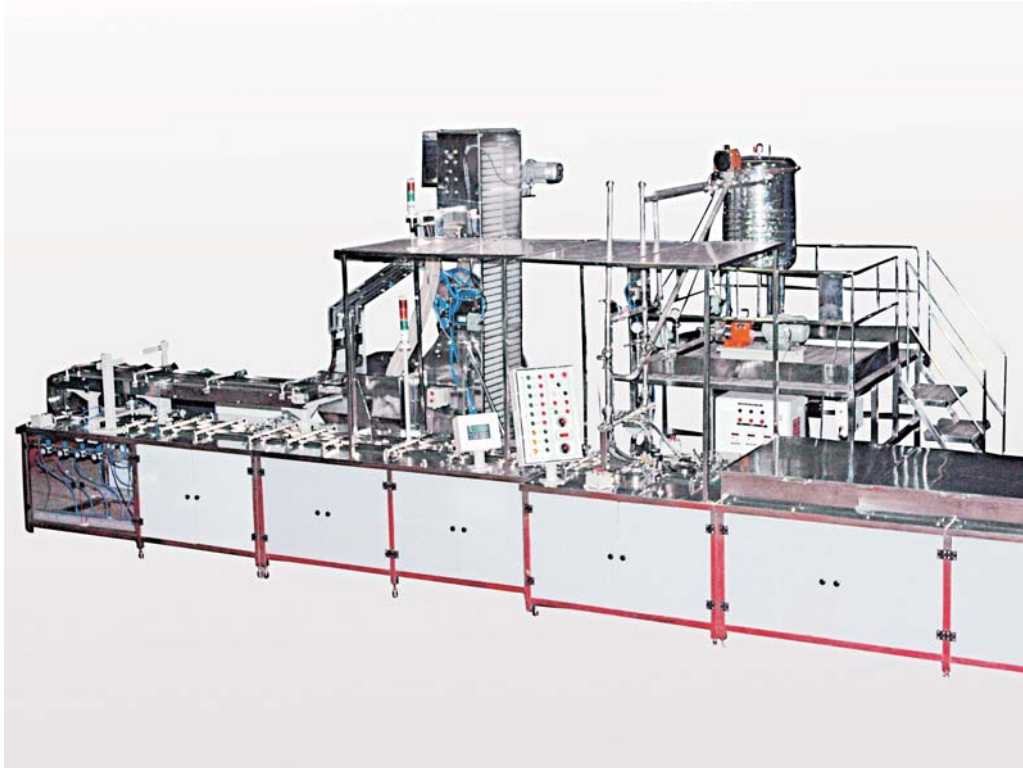

AURUM PACKAGING SYSTEMS PVT. LTD.

Office: 101, Shivneri, Near Gamdevi Maidan, Naupada, Thane-400602. INDIA

Phone: (91-22) 25415807, Fax: (91-22) 25425782.

E-mail: sales@aurumpackaging.com Website: www.aurumpackaging.com

BALM / OINTMENT FILLING SYSTEMS

TECHNICAL SPECIFICATIONS:

☞ Product	Ointments or Balm in molten condition Viscous and Semi-Viscous Fluids Free Flowing Liquids		
☞ Container	Package Material Shape	Flats, Tins, Jars, Pots, Tubs, Bottles, Sticks Plastic / Metal / Glass Round / Rectangular / Square / Oval	
☞ Fill Volume	1.2 – 200 ml		
☞ Output Speed	Upto 600 Containers / Min		
☞ Electrical Power	2 KW, 440 VAC, 3 Phase, 50 Hz		
☞ Overall Dimensions	2.4 M (L) x 0.8 M (D) x 1.2 M (H)		

SALIENT FEATURES:

- ☞ PLC Controlled Operation
 - ☞ Operator Interface Panel
 - ☞ Contact parts in S.S. / PVC / Nylon
 - ☞ Machine Speed Control through VFD
 - ☞ Digital Machine Speed Display
 - ☞ Minimum Level Sensor to stop Filling Machine
 - ☞ Pressure – Temperature – Time based Filling.
-

OPTIONAL FEATURES

- ☞ Unscrambler / Turntable for container feeding
 - ☞ Hopper Elevator Pneumatic / Mechanical
Hopper Capacity 250 / 320 / 500 / 1000 / 3000 Litres
Hopper Empty Alarm
 - ☞ Unscrambler Gravity / Pneumatic
 - ☞ Orientator Linear Servo Controlled Single Row
 Rotary Pneumatic, 6 – 12 Heads
 Detection Sensor / Camera / Vision System
 - ☞ Multi-track models for higher outputs
 - ☞ Storage Tank with Level Controller
 - ☞ Heat tracing with Temperature Controller for hot filling liquids
 - ☞ Gravity – Time based Filling
-

Please consult AURUM for special applications

(We reserve the right to change the specifications without notice)