
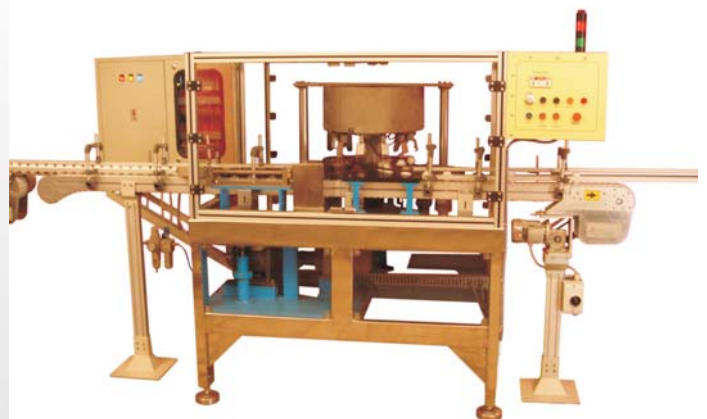


AURUM

Orientators

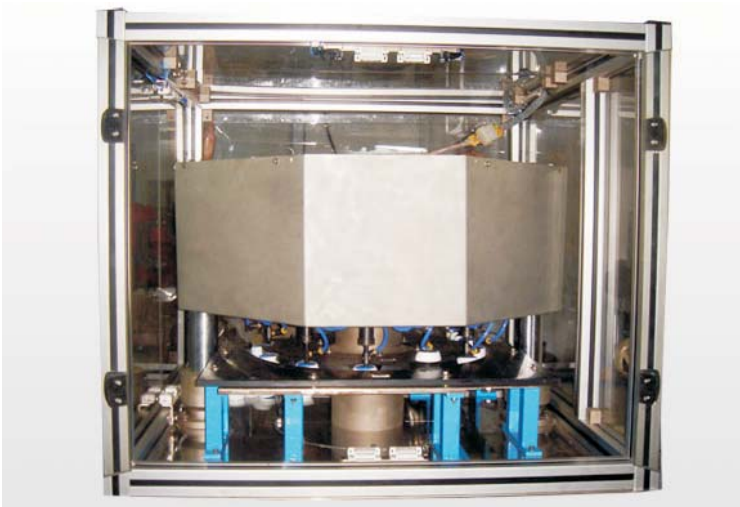

AURUM PACKAGING SYSTEMS PVT. LTD.

Office: 101, Shivneri, Near Gamdevi Maidan, Naupada, Thane-400602. INDIA

Phone: (91-22) 25415807, Fax: (91-22) 25425782.

E-mail: sales@aurumpackaging.com Website: www.aurumpackaging.com

ORIENTATOR

TECHNICAL SPECIFICATIONS:

☞ Configuration	Linear / Rotary
☞ Principle of Operation	Linear Servo Controlled, Single Row Rotary Pneumatic, 6-12 Heads
☞ Container	Jars / Bottles / Caps
☞ Detection	Sensor / Camera / Vision System
☞ Output	Upto 240 Units / Min
☞ Electrical Power	Linear 1.0 KW, 440 VAC, 3 Phase, 50 Hz Rotary 3.0 KW, 440 VAC, 3 Phase, 50 Hz
☞ Compressed Air	To suit application
☞ Overall Dimensions	Linear 3.5 M (L) x 0.75 M (D) x 2.0 M (H) Rotary 4.0 M (L) x 1.2 M (D) x 2.4 M (H)

SALIENT FEATURES:

- ☞ Servo Controlled Orientation
- ☞ PLC Controlled Operation
- ☞ VFD for Machine Speed Control
- ☞ Contact parts in S.S. / PVC / Nylon
- ☞ Machine Guard with Interlocks