


**AURUM**

---

# Screw Capper

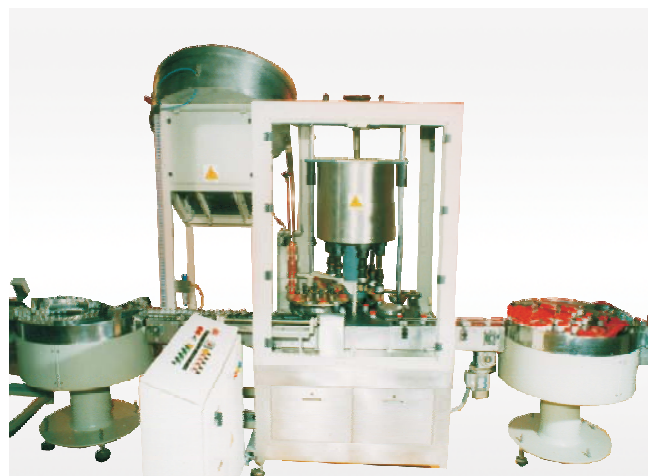

---

**AURUM PACKAGING SYSTEMS PVT. LTD.**

Office: 101, Shivneri, Near Gamdevi Maidan, Naupada, Thane-400602. INDIA

Phone: (91-22) 25415807, Fax: (91-22) 25425782.

E-mail: [sales@aurumpackaging.com](mailto:sales@aurumpackaging.com) Website: [www.aurumpackaging.com](http://www.aurumpackaging.com)

## SCREW CAPPER

---

### TECHNICAL SPECIFICATIONS:

---

☞ Container	Bottle Diameter	20 – 100 mm
	Bottle Height	20 – 300 mm
	Material	Plastic / Metal / Glass
	Shape	Round / Rectangular / Square / Oval
☞ Cap	Cap Diameter	20 – 60 mm
	Cap Height	8 – 30 mm
	Material	Plastic / Metal
☞ Output Speed	Upto 240 Containers / Min	
☞ Electrical Power	3.0 KW, 440 VAC, 3 Phase, 50 Hz	
☞ Compressed Air	To suit Application	
☞ Overall Dimensions	4.0 M (L) x 1.2 M (D) x 2.4 M (H)	

---

### SALIENT FEATURES:

---

- ☞ PLC Controlled Operation
  - ☞ Operator Interface Panel
  - ☞ Available with 6 to 12 Capping Heads
  - ☞ Pneumatic Cap Grippers
  - ☞ Cap Gripping, Pick-up, Screwing by Capping Head
  - ☞ Torque Control: Mechanical / Magnetic
  - ☞ Quick Changeover
  - ☞ Contact parts in S.S. / PVC / Nylon
  - ☞ Machine Speed Control through VFD
  - ☞ Digital Machine Speed Display
  - ☞ Machine Guard with interlocks
  - ☞ Minimum Level Sensors to stop Capping Machine
  - ☞ Level Sensor to start-stop Unscrambler automatically
  - ☞ Level Sensor to start-stop Hopper Elevator automatically
- 

### OPTIONAL FEATURES

---

☞ Hopper Elevator	Pneumatic / Mechanical	
	Hopper Capacity	250 / 320 / 500 / 1000 / 3000 Litres
	Hopper Empty Alarm	
☞ Unscrambler	Gravity / Pneumatic	
☞ Orientator	Linear	Servo Controlled Single Row
	Rotary	Pneumatic, 6 – 12 Heads
	Detection	Sensor / Camera / Vision System

---