
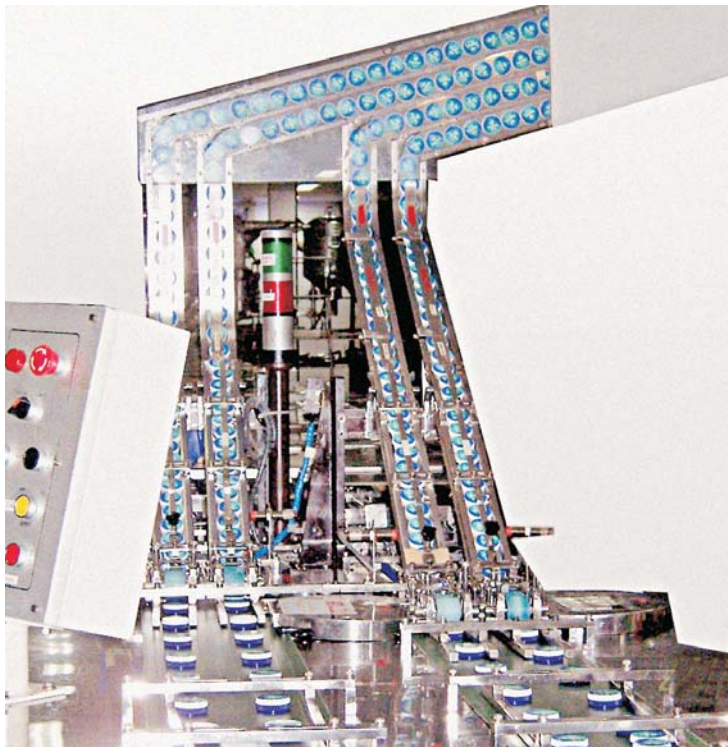


AURUM

Snap On Capper

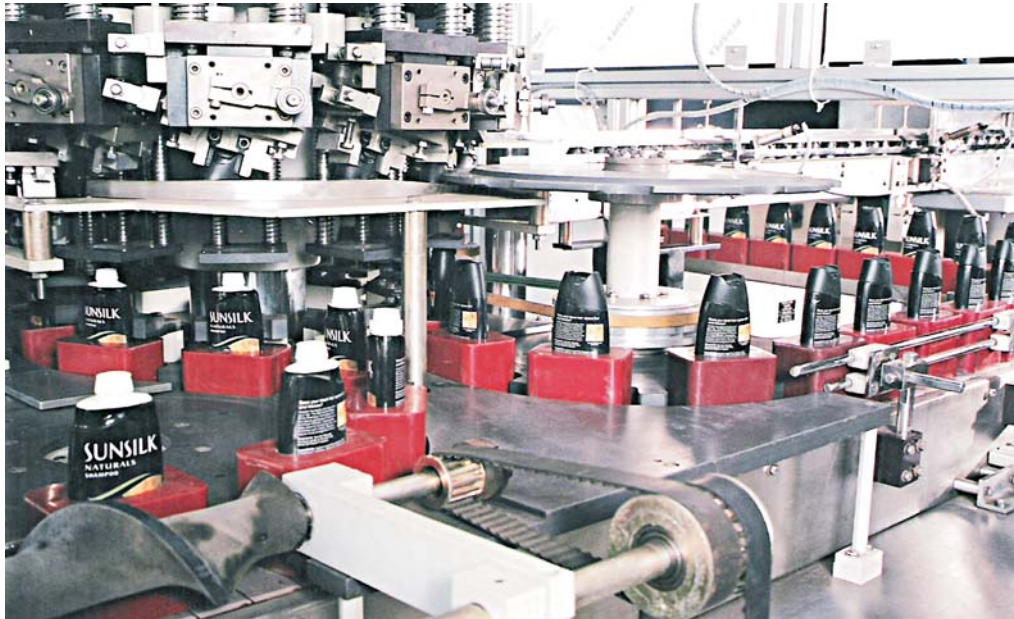

AURUM PACKAGING SYSTEMS PVT. LTD.

Office: 101, Shivneri, Near Gamdevi Maidan, Naupada, Thane-400602. INDIA

Phone: (91-22) 25415807, Fax: (91-22) 25425782.

E-mail: sales@aurumpackaging.com Website: www.aurumpackaging.com

SNAP – ON CAPPER

TECHNICAL SPECIFICATIONS:

☞ Configuration	Linear / Rotary
☞ Container	Bottle Diameter 20 – 100 mm Bottle Height 8 – 300 mm Material Plastic / Metal / Glass Shape Round / Rectangular / Square / Oval
☞ Cap	Cap Diameter 20 – 60 mm Cap Height 8 – 50 mm Material Plastic / Metal Shape Round / Rectangular / Square / Oval
☞ Output Speed	Upto 1000 Containers / Min (For Linear Capper) Upto 240 Containers / Min (For Rotary Capper)
☞ Electrical Power	3.0 KW, 440 VAC, 3 Phase, 50 Hz
☞ Compressed Air	To suit Application
☞ Overall Dimensions	4.0 M (L) x 1.2 M (D) x 2.4 M (H)

SALIENT FEATURES:

- ☞ PLC Controlled Operation
 - ☞ Operator Interface Panel
 - ☞ Linear model available in 1 / 2 / 4 rows.
 - ☞ Rotary model available with 6 to 12 Capping Heads.
 - ☞ Pneumatic Cap Grippers / Mechanical Cap Locators
 - ☞ Cap Gripping, Pick-up, Pressing by Capping Head in Rotary Capper
 - ☞ Quick Changeover
 - ☞ Contact parts in S.S. / PVC / Nylon
 - ☞ Machine Speed Control through VFD
 - ☞ Digital Machine Speed Display
 - ☞ Machine Guards with interlocks
 - ☞ Minimum Level Sensors to stop Capping Machine
 - ☞ Level Sensor to start-stop Unscrambler automatically
 - ☞ Level Sensor to start-stop Hopper Elevator automatically
-

OPTIONAL FEATURES

☞ Hopper Elevator	Pneumatic / Mechanical Hopper Capacity 250 / 320 / 500 / 1000 / 3000 Litres Hopper Empty Alarm
☞ Unscrambler	Gravity / Pneumatic
☞ Orientator	Linear Servo Controlled Single Row Rotary Pneumatic, 6 – 12 Heads Detection Sensor / Camera / Vision System
